


# IOM-21

## TFT-monitor 21,5" openframe

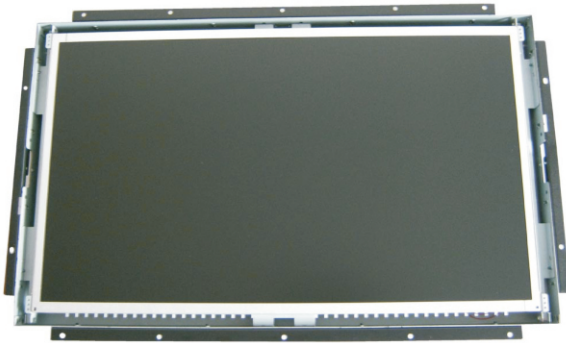

### Overview:

- TFT monitor as openframe
- screen diagonale 21,5", widescreen 16:9
- Connector RGB analog and DVI
- low-reflection
- optional resistive touchscreen
- VESA-100 preparation backside
- Customized available

### Description

The openframe monitors of the IOM series are specially suitable for industrial use. The monitors can be integrated with existing front panels or control panels. The robust case enables use in the toughest environments in 24-hour operation. The standard units have an external wide range power supply, an analog VGA / DVI-D input. At the back of the monitor can be mounted on a VESA holder, or via the existing mounting plates can be integrated.

### Technical data

#### **Overview:**

Industrial TFT monitor as openframe modul for control panel or control desk

#### **Interfaces:**

HD-SUB15 analog RGB, DVI optional video input

#### **Resolution:**

IOM-21: max 1920x1080

#### **Adjustments:**

via on-screen-menu

#### **Brightness:**

min. 300 cd/qm

#### **Contrast:**

1000:1

#### **Power supply:**

90-230VAC

#### **MTBF:**

LED min. 50000h

#### **Control elementa:**

Touchscreen resistiv (option)

#### **Mechanical dimension:**

Case with Flanges: about 550 x 334 x 63mm

Case without Flanges: about 532 x 318 x 63mm

#### **Material:**

Case: Steel

#### **Ambient conditions:**

Operating temperature 0-45°C

Storage temperature 0-65°C

Humidity: 10 - 80 % rel. humidity, not condensing

#### **Norms:**

EN55022 EN55024 EN61010-1

### Part number

10050346 IOM-21, 21,5 "Openframe monitor

10050347 IOM-21-T, 21,5" Openframe monitor with touchscreen

