


# IPM-24

## TFT-monitor 24" panel mount

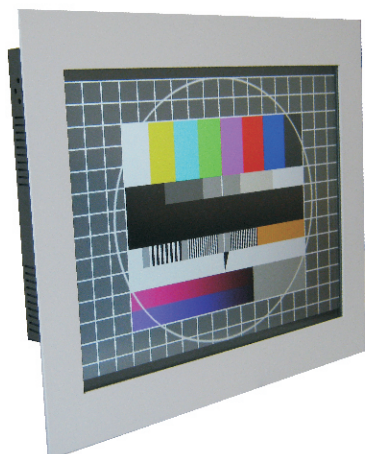

### Overview

- TFT / LCD monitor for front panel mounting
- Screen diagonal 24"
- Connections RGB analog and DVI
- Optional video input
- Optional resistive touchscreen
- Frontplate with backside threaded bolts
- Customization possible

### Description

The industrial panelmonitors of the IPM serie are specifically suitable for use in control panels, control desk and control cabinet doors conceived.

Mounting on rear side bolts in the front panel, so a flat front is maintained.

The robust case enables use in the toughest environments in the 24-hour operation.

The standard devices have a 230 VAC power supply and an analog VGA and DVI input.

Optionally available with 12VDC/24VDC and video input.

Also possible as an option with integrated resistive touch.

### Technical data

#### Overview:

Industrial TFT monitor for mounting in control panel / desk or control cabinet doors

#### Interfaces:

HD-SUB15 analog RGB, DVI  
optional video input

#### Resolution:

1920x1080 "widescreen"

#### Adjustments:

via on-screen-menu

#### Brightness:

min. 300 cd/qm

#### Contrast:

1000:1

#### Power supply:

230VAC, optional 12 or 24VDC

#### MTBF:

Backlights min. 50000h

#### Control elements:

Touchscreen resistiv (option)

#### Mechanical dimensions

Case: about. 579 x 373 x 61mm

Frontplate: about 620 x 415 x 4 mm

#### Material:

Frontplate: aluminium anodized,  
anti-glare protective glass

Case: Steel

#### environmental conditions:

Operating temperature 0-45°C

Storage temperatur 0-65°C

Humidity: 10 - 80 % rel. humidity, not condensing

#### Protective class:

Front IP 65

#### Norms:

EN55022 EN55024 EN61010-1

### Part number

10050319	IPM-24, 24" Panel monitor
10050357	IPM-24T panlemonitor with Touchscreen