

IOM-15W

TFT-Monitor 15" Openframe Modul



overview:

- TFT / LCD monitor Openframe Modul
- screen diagonal 15"
- Interface RGB analog / DVI and HDMI
- wideangledisplay 178°
- mounting via brackets
- optional touchscreen
- customizations possible

Description:

The IOM-15W open-frame monitors are designed for use in industrial applications. They can be easily integrated into existing front panels or control consoles. The robust steel sheet housing with integrated control electronics and power supply enables reliable operation even in harsh environments and supports 24/7 continuous operation. Standard units are equipped with a 230 VAC Phoenix connector and VGA, DVI, and HDMI inputs. Versions with a 9–36 VDC wide-range power supply are available as an option.

technical data:

overview:

15" industrial TFT / LCD monitor Openframe-Modul for control panels and control desks

Resolution:

max. 1024x768

Brightness:

min. 350cd/qm

Contrast:

1000:1

Interface:

VGA DVI, HDMI , optional DP

Adjustments:

via On Screen Menü

MTBF:

Backlights min. 35000h

controls:

Touchscreen (Option)

power supply

115/230 VAC Phoenixconnector

mechanical dimensions:

case with brackets: about 367 x 292 x 58mm

material:

case: steel

environmental conditions:

operating: 0-50°C

storage 0-65°C

humidity: 10 - 80 % rel. humidity

not condensing

norms:

EMV: EN55022 EN55024 EN61010-1

part number:

10050430 IOM-15 1" Openframe-Monitor 230VAC

10050433 IOM-15 15" Openframe-Monitor 9-36VDC


10050534 Option Touchscreen 15" USB

IOM-15W

TFT-Monitor 15" Openframe Modul




Top View




Side View



Front View

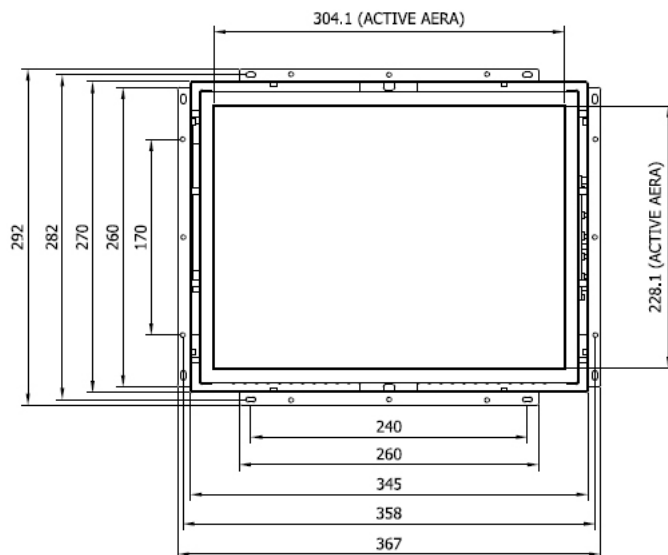

Bottom View

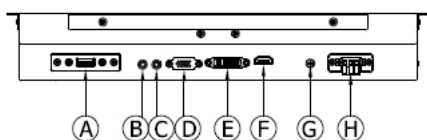


① Power ② Enter ③ Up ④ Down ⑤ Menu

(A) USB for touch (B) Earphone in (C) PC Audio in (D) VGA in

(E) DVI in (F) HDMI in (G) Ground (M4) (H) Power

(AC115V~230V or DC 9V~36V)

Side View

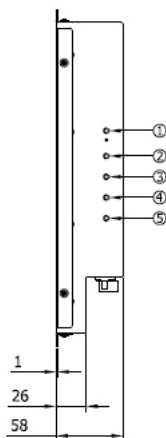

Rear View

