


IRM-17

TFT-monitor 17" rack mounting

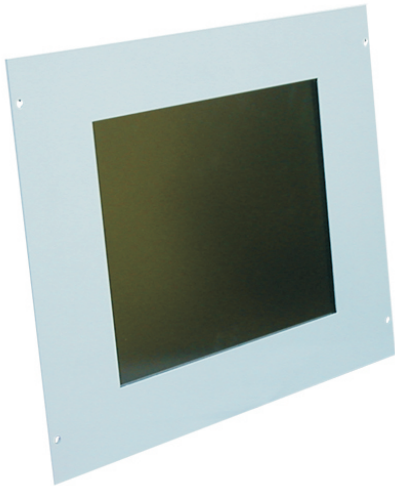

Overview

- TFT / LCD monitor for 19" rack mounting
- Screen diagonal 17"
- Connector RGB analog and DVI
- Optional video input
- Optional resistive touchscreen
- Frontplate 19" 8HE
- Customization available

Description

The industrial rack monitors of the IRM serie are especially suitable for industrial use in 19" racks or control cabinets.

The robust case enables use in the toughest environments in 24-hour operation.

The LCD monitors are delivered with front plate for 19" cabinet / rack.

The standard units have an external wide range power supply, an analog VGA and DVI input. Optionally, a resistive touch screen can be integrated.

Technical data

Overview:

Industrial TFT monitor for 19" rack or control cabinet doors

Interfaces:

HD-SUB15 analog RGB, DVI
optional video input

Resolution:

IRM17: max. 1280x1024 (SXGA)

Adjustments:

via on-screen menu

Brightness:

min. 300 cd/qm

Contrast:

1000:1

Power supply:

115/230VAC, optional 12 or 24VDC via internal power supply / converter

MTBF:

Backlights min. 40000h

Control elements

Touchscreen resistiv (option)

Mechanical dimension:

Case: 377 x 338 x 60mm

Frontplate: 19" 8HE, 483 x 356 x 4mm

Material:

Frontplate: aluminium powder-coated RAL7035,
different color and anodized front on request, anti-glare protective glass

Case: Steel

Ambient conditions:

Operating temperature 0-45°C

Storage temperature 0-65°C

Humidity: 10 - 80 % rel. humidity, not condensing

Protective class:

Front IP 65

Norms:

EN55022 EN55024 EN61010-1

Part number

10050306 IRM-17, 17" Rackmonitor SXGA

10050508 Option Touchscreen 17" USB